

AGATE

60X120 — 23,62"X47,24"



Porcelánico
Porcelain



Polivalente
Versatile



Muy Dest.(v4)
Shade Variation: High



No Repetitivo
No Repetitive



Anthielo
Frost proof




Rectificado
Rectified



AGATE SABBIA PULIDO
BT6012P



AGATE GREY PULIDO
BT6012GRP

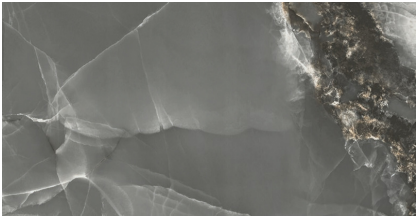

AGATE DARK PULIDO
BT6012GRP

CARACTERÍSTICAS TÉCNICAS / TECHNICAL CHARACTERISTICS

Formato Size		Color Colour	MOHS (Dureza) Strength Resistance	PEI		DESGLIZAMIENTO GLIDE			Absorción de Agua Water Absorption	Resistencia Química / Chemical Resistance								Resistencia a las Manchas Stain Resistance			Resistencia Mecánica Mechanical Resistance	
				Clase Class	Etapa Abrasión Abrasion Stage	UNE-ENV 12633:2003	DIN 51130**	DIN 51097**		P.D. Limpieza Cleaning	Aditivos Agua Piscina Additive pools water	Ácidos y Alcalis Acids and Alkalis (Baja concentración) (Low concentration)			Ácidos y Alcalis Acids and Alkalis (Alta concentración) (High concentration)							
												PÉNDULO PENDULUM	RAMPA RAMP	PIE DESCALZO BARE FOOT	Cloruro Amónico. Ammonia Chloride	Ácido Cloríd. Hydrochloric Acid	Ácido Cítrico. Citric Acid	Hidróxido Potásico Potassium Hydroxide	Ácido Cloríd. Hydrochloric Acid	Ácido Láctico Lactic Acid	Hidróxido Potásico Potassium Hydroxide	Con Acción Trazante Tracing Action
60X120	Sabbia	4	4	6000	0			<0,5%	GA	GA	GLA	GLA	GLA	GBH		GBH	5	5	5	RESISTE	>35N/mm2	
	Grey	4	4	6000	0			<0,5%	GA	GA	GLA	GLA	GLA	GBH		GBH	5	5	5	RESISTE	>35N/mm2	
	Dark	4	2	6000	0			<0,5%	GA	GA	GLA	GLA	GLA	GBH		GBH	5	5	5	RESISTE	>35N/mm2	



Se aconseja uso del Sistema Nivelado

We recommend using Levelling System to fix the tiles

: 27/12/2022