

MADERA
WOOD

ORIANA

22,5 x 90 cm · 9" x 36"

MATT FINISH / ACABADO MATE · RED BODY PORCELAIN




Oriana Pino
22,5 x 90 CM

GT7A



Oriana Grey · Available in Antislip
22,5 x 90 CM

GT7A

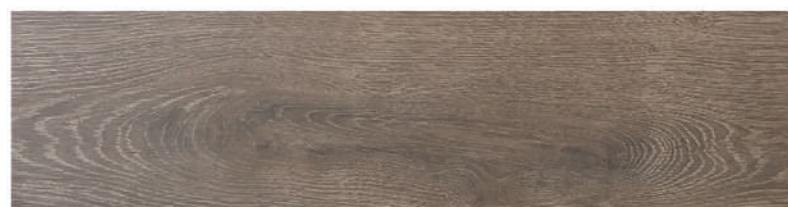

Oriana Nogal · Available in Antislip
22,5 x 90 CM

GT7A



Oriana Ceniza · Available in Antislip
22,5 x 90 CM

GT7A



Oriana Nordic
22,5 x 90 CM

GT7A

DIFFERENT DESIGNS IN EACH BOX




* Combinable with our entire range of hydraulic tiles (OLD SCHOOL, ORIGIN, CHIC...)

PACKING	BOXES PALLET	SQM BOX	SQM PALLET	KGS PIECE	KGS BOX	KGS PALLET	PIECES BOX	PALLETS CONTAINER	SQM CONTAINER	WEIGHT CONTAINER	THICKNESS	ABSORPTION
DK - 22,5 x 90 CM	33	1,82	60,06	4,500	40,80	1.362	9	18	1.081,08	24.518	1,00	E<0,5



MERCHANDISING

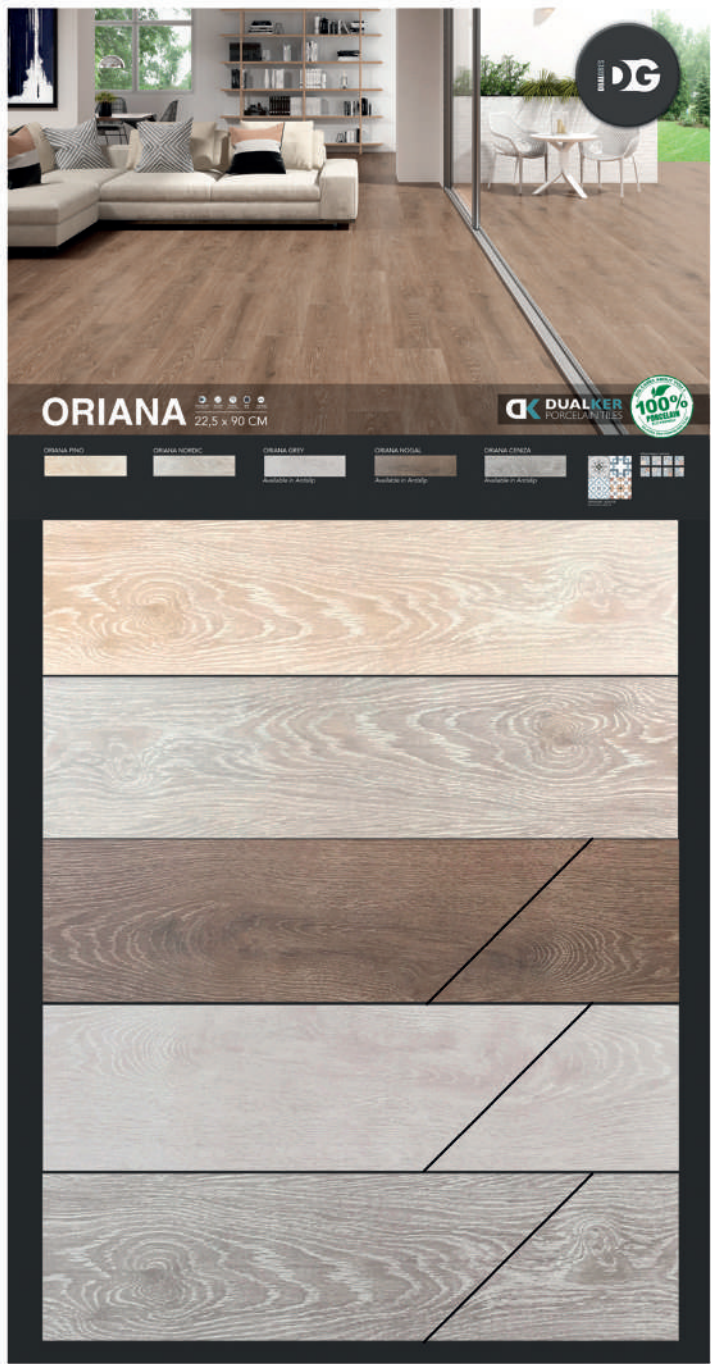

D19_028 · PANEL ORIANA

TECHNICAL SHEET

CARACTERÍSTICAS TÉCNICAS

UNE-EN.14411:2016 Norma/Norm		Gres porcelánico Porcelain Tiles	 DUALKER
UNE-EN-ISO 10545		ANEXO / ANNEX G	ANEXO / ANNEX G
		GRUPO / GROUP Bla	GRUPO / GROUP Bla
		N≥15cm	N≥15cm
	Absorcion de agua /Water absorption	E≤0,50%	E≤0,30%
	Fuerza de Rotura en N /Breaking Strenght, in N	≥ 1300N	≥ 2000N
	Resistencia a la Flexion N/mm₂ /Modulus of rupture, in N/mm ₂	Media / Average ≥ 35	Media/Average ≥ 43

	TEST METHOD	STANDARD	 DUALKER
RESISTENCIA AL DESLIZAMIENTO /SLIP RESISTANCE	UNE-ENVE-12633	CTE	C2
	BS 7976-2: 2002	PTV	LOW (40)
	AS/NZS 4586: 2013	Pendulum SRV	P3
	DIN 51130: 2014	Inclined Plane	R10
	ANSI A137.1: 2012 (DCOF)	≥ 0,42W	0,72W



CONTACT US:

Ctra. de Viver al Puerto de Burriana, km 56,9
ONDA (CASTELLÓN) · SPAIN

Tel: (+34) 964 77 11 66

www.dualgres.com export@dualgres.com

